



Rec'd PCT/PTO

19 OCT 2004



INVESTOR IN PEOPLE

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 22 MAY


WIPO	
REC'D 22 MAY 2003	
WIPO	PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

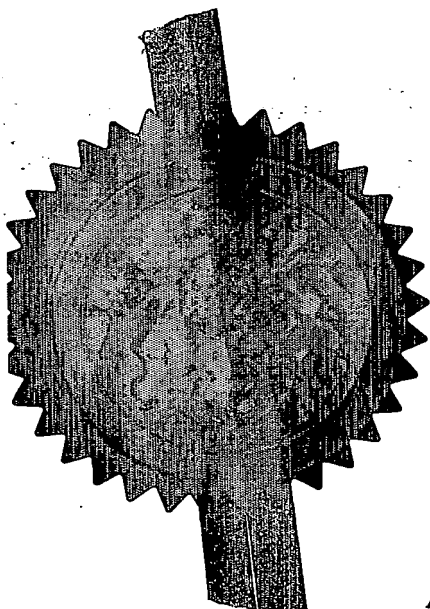

Signed

Andrew Gervay

Dated

9 May 2003

BEST AVAILABLE COPY

THE PATENT OFFICE

The Patent Office

1/77

8 MAY 2002

08MAY02 E716723-1 D02776

P01/7700 0.00-0210417.2

The Patent Office

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

QIP/P7069

2. Patent application number

(The Patent Office will fill in this part)

0210417.2

8 MAY 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

QINETIQ LIMITED

Registered Office 85 Buckingham Gate
London SW1E 6PD
United Kingdom

Patents ADP number (if you know it)

8183857001

If the applicant is a corporate body, give the country/state of its incorporation

GB

4. Title of the invention

Respirator Assembly

5. Name of your agent (if you have one)

Robert William Obee

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

QINETIQ LIMITED

IP Formalities

A4 Bldg

Cody Technology Park

Ively Road

Farnborough

Hants GU14 0LX United Kingdom

8183857001

Patents ADP number (if you know it)

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number or earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or

YES

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description 5

Claim(s) 2

Abstract 1

Drawing(s) 3

+ 3

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 1 + 3

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I / We request the grant of a patent on the basis of this application.

Signature

R W Obee, Agent for the Applicant

Date 07/05/2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Mrs Linda Bruckshaw 01252 392722

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent of the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have attached 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Respirator Assembly

5 The present invention relates to a respirator assembly for the protection of personnel
against contaminated or otherwise irrespirable environments. It has particular
application for use by aircrew or other military personnel who may be exposed to the
risk of nuclear, biological or chemical (NBC) attack, but may be found to be of more
general application wherever breathing apparatus must be used, e.g. in firefighting or
for industrial use where work must be performed in hazardous environments.

10

It is recognised that wearing a conventional respirator, which encompasses the whole
head or at least the face of the user to isolate the nose, mouth and eyes from the
external environment, imposes a considerable physiological burden on the user and
severely limits the duration for which it can be worn without reducing the user's
15 ability to perform his mission effectively. It is therefore desirable to match the
protection to the hazard so that personnel are not required to wear full respirators for
extended periods of time when standing by for action or when there may be a threat of
a hazard but no actual hazard encountered. On the other hand, donning a
conventional respirator, and in particular ensuring that it is adequately sealed against
20 the head to exclude the external environment, can be quite time-consuming, and it
may be too late to attempt to don when the hazard is actually encountered. In the case
of military combat aircrew who may require NBC protection, for example, it is quite
impractical for a conventional respirator to be donned in flight, meaning in effect that
a decision must be made at the commencement of a mission between wearing full
25 protection for the duration of the mission - with the consequent and possibly
unnecessary physiological burden which that implies - or no protection.

30

With the foregoing in mind, respirator assemblies have been proposed which can be
worn in a partially disassembled, open face condition to permit free breathing of
ambient air, and which are completed with a face piece supplied from a suitable
source of breathing gas when the need arises. For example US-A-5575278 discloses
an assembly comprising a helmet with a flexible envelope extending downwards and
sealing around the neck of the user, and a separate face piece which can be attached to

the helmet when required. In this arrangement isolation from the external environment depends on the neck seal which can be uncomfortable to wear and, being

a component of the "permanent" part of the respirator, imposes this burden under both the partially disassembled and fully assembled conditions of use. US-A-5078130

5 discloses an assembly comprising a helmet with a face piece hinged to it which can be tilted up out of the way or pivoted down and pressed back against the helmet to complete the system as required. The face piece carries a seal to seal around the periphery of the user's face when pressed back against the helmet. Isolation from the external environment and conservation of the breathing gas supply depends on the
10 quality of this face seal and in practice it may not be possible to ensure an adequate fit under all likely operational conditions and particularly in haste.

The present invention seeks to provide a respirator assembly which overcomes the above-indicated drawbacks of the prior art and accordingly resides in an assembly
15 comprising: a first sub-assembly adapted to be worn on the head and including sealing means adapted to form a seal around the periphery of the user's face when worn; and a second sub-assembly separable from the first sub-assembly but selectively co-operable therewith, the second sub-assembly comprising a face piece adapted to co-operate with the first sub-assembly to define therewith a facial cavity bounded by said
20 sealing means; and including inlet means connectable to a source of breathing gas for supply to said facial cavity and outlet means for the exhaustion of exhaled gas from said facial cavity.

In use of the present invention the first sub-assembly can be donned at the outset and
25 the necessary time taken to ensure that its sealing means is adequately sealed against the user's face before there is any risk of exposure to the hazardous environment for which the respirator is intended. It can be worn in this condition to permit free breathing of ambient air, and with the face seal providing substantially better comfort in use than a constrictive neck seal, until the user is subject to the risk of attack or
30 otherwise required to enter the intended hazardous environment, at which time the second sub-assembly is used to complete the system. An assembly according to the invention may therefore achieve better comfort and/or reliability for the user than those disclosed in US-A-5575278 and US-A-5078130.

The first and second sub-assemblies may be completely separable whereby the first sub-assembly can be worn alone, the second sub-assembly being demountably attachable to the first. Alternatively the second sub-assembly may be hinged or otherwise articulated to the first.

5

In a preferred embodiment the first sub-assembly comprises headgear including a substantially rigid ring structure adapted to be juxtaposed to the user's face when the headgear is donned and from which said sealing means extend to engage around the periphery of the user's face, the second sub-assembly being configured to be mounted to said ring structure and secured thereto by releasable fastening means. In any event the first sub-assembly may comprise headgear in any appropriate form, such as a flexible hood, an impact-resistant helmet, or simply a harness sufficient to hold the rest of the assembly in position.

15

The respirator assembly may be used with any suitable source of breathing gas in accordance with the intended service. For example it may be connected to a cylinder or other supply of compressed air or oxygen, or a filter canister selected for the hazard in question, with or without fan assistance, all in accordance with conventional practice.

20

The invention will now be more particularly described, by way of example, with reference to the accompanying drawings in which: -

25

Figures 1 and 2 are respective pictorial views of one preferred embodiment of a respirator assembly according to the invention shown in use in its partially disassembled and fully assembled conditions; and

30

Figures 3 and 4 are respective schematic cross-sectional views corresponding to Figures 1 and 2.

The illustrated embodiment of the invention is in the form of a respirator hood assembly for providing protection against NBC hazards. It comprises a first, hood sub-assembly 1 shown donned on its own in Figures 1 and 3 and a second, face piece sub-assembly 2 shown attached to the hood sub-assembly in Figures 2 and 4.

With reference to Figures 1 and 3, the sub-assembly 1 comprises a flexible head covering 3 which is also extended downwards over the shoulders of the user, and a substantially rigid profiled ring 4 attached to the head covering so as to encircle the face of the user at an appropriate spacing when the head covering is donned. The ring 4 and covering 3 are secured together around the whole of their mating edges and additional adjustable ties 5 are provided between these elements to assist in supporting the ring 4 and the second sub-assembly 2 when the latter is added. The ring 4 also carries a profiled elastomeric gasket 6 which extends into sealing engagement around the periphery - brow, temples, cheeks and chin - of the user's face when the head covering is donned.

In operation the user can don the sub-assembly 1 as shown in Figures 1 and 3, prior to a mission, and take the time to ensure that the gasket 6 is properly and comfortably sealed against his face before there is any risk of exposure to the hazard. He can continue to wear the apparatus in that condition into the mission, breathing ambient air through its open front, until such time (if any) as respiratory protection is required, when the sub-assembly 2 can be added.

With reference to Figures 2 and 4, the sub-assembly 2 comprises a moulded face plate 7 with inset lens 8 and a fitted air supply hose 9. Internally it carries an oronasal mask 10 (Figure 4) with a soft sealing edge 10A to engage around the mouth and nose of the user when donned. The face piece sub-assembly 2 can be demountably attached to the hood sub-assembly 1 and in the illustrated embodiment is retained by lugs (not shown) on the face plate 7 engaging in sockets 11 (Figure 1) formed on the ring 4, one of which includes a manually-releasable latch 11A. The periphery of the face plate 7 is profiled to match the contour of the ring 4 and carries a seal 12 (Figure 4) to ensure a gas-tight connection between those elements when attached.

In the fully assembled condition of the respirator shown in Figure 4 a facial cavity 13 is formed, bounded by the face plate 7 and gasket 6, in which the user's nose, mouth and eyes are isolated from the external environment. The integrity of the peripheral face seal formed by the gasket 6 is crucial in this respect, and can be ensured by the careful donning of the sub-assembly 1 prior to a mission. The sub-assembly 2 can thereafter be donned quickly when required to complete the respirator without

compromising the integrity of the face seal. Within the facial cavity 13 a smaller subdivision 14 is formed by the interior of the oronasal mask bounded by the sealing edge 10A, but the integrity of the latter is of secondary importance to the gasket 6.

5 In use of the respirator air is supplied via the hose 9 (Figure 2) under a regulated positive pressure and enters the oronasal mask cavity 14 through a one-way inlet valve 15 (Figure 4). Exhaled air is vented to atmosphere through a one-way outlet valve 16. A stream of air is also directed through ports (not shown) in the mask 10 to pass over the interior face of the lens 8 for demisting purposes, in accordance with
10 known practice.

The hood can be worn under an impact-resistant helmet if required and the face piece sub-assembly 2 donned and doffed without removing the helmet. The material of the head covering 3 can be selected to resist inward penetration of hostile airborne
15 droplets and vapours but sufficiently air-permeable to permit evaporative cooling of the user's head, (for example a microporous charcoal-impregnated cloth).

By virtue of the face seal formed by gasket 6 the assembly will be substantially more comfortable to wear, both in the fully assembled and partially disassembled
20 conditions, than those respirator hoods which depend on the provision of a neck seal. The air-permeable head covering 3 will also enhance user comfort. At the same time, by making the gasket 6 part of the sub-assembly 1 which can be donned at leisure, the integrity of the face seal can be more reliably ensured than in those assemblies where a face seal is applied only when a threat is encountered and likely in haste.

25

In a variant of the illustrated embodiment the lens 8 is provided in a separate unit which can be sealingly attached to the face plate 7 or removed from it if required. The remainder of the assembly can therefore be worn without the lens unit to partially relieve the physiological burden on the user when there is no threat of contamination
30 but e.g. when aircrew require to wear the mask 10 for hypoxia and/or G protection, the lens unit subsequently being added if a threat is encountered.

Claims

1. A respirator assembly comprising: a first sub-assembly adapted to be worn on the head and including sealing means adapted to form a seal around the periphery of the user's face when worn; and a second sub-assembly separable from the first sub-assembly but selectively co-operable therewith, the second sub-assembly comprising a face piece adapted to co-operate with the first sub-assembly to define therewith a facial cavity bounded by said sealing means; and including inlet means connectable to a source of breathing gas for supply to said facial cavity and outlet means for the exhaustion of exhaled gas from said facial cavity.
2. A respirator assembly according to claim 1 wherein the first and second sub-assemblies are completely separable whereby the first sub-assembly can be worn alone, the second sub-assembly being demountably attachable to the first sub-assembly.
3. A respirator assembly according to claim 2 wherein the first sub-assembly comprises headgear including a substantially rigid ring structure adapted to be juxtaposed to the user's face when the headgear is donned and from which said sealing means extend to engage around the periphery of the user's face, the second sub-assembly being configured to be mounted to said ring structure and secured thereto by releasable fastening means.
4. A respirator assembly according to claim 1 wherein the second sub-assembly is articulated to the first sub-assembly.
5. A respirator assembly according to any preceding claim wherein the first sub-assembly comprises headgear in the form of a flexible hood of air-permeable material.


6. A respirator assembly according to any preceding claim wherein the second sub-assembly includes an oronasal mask to be disposed within said facial cavity.
7. A respirator assembly according to any preceding claim wherein said inlet means and outlet means are comprised in the second sub-assembly.
8. A respirator assembly according to any preceding claim wherein the second sub-assembly includes a demountable lens portion.
9. A respirator assembly substantially as hereinbefore described with reference to the accompanying drawings.


Abstract

Respirator Assembly

A respirator assembly e.g. for NBC protection is formed from two separate sub-assemblies 1 and 2. The first sub-assembly 1 comprises a flexible hood 3 (or other suitable headgear), a rigid mounting ring 4 and a peripheral face seal 6. The second sub-assembly 2 comprises a face plate 7 with lens 8, oronasal mask 10 and inlet and outlet valves 15,16, and is demountably attachable to the ring 4. The first sub-assembly can be worn on its own with the user breathing ambient air through the open front, the second sub-assembly being added if and when a hazard is encountered. The positioning of the face seal 6 in the first sub-assembly means that a comfortable and reliable fit can be ensured when that sub-assembly is donned prior to a mission, but the user is relieved of the physiological burden of wearing the complete respirator unless and until protection is required.

Figure 4 refers.

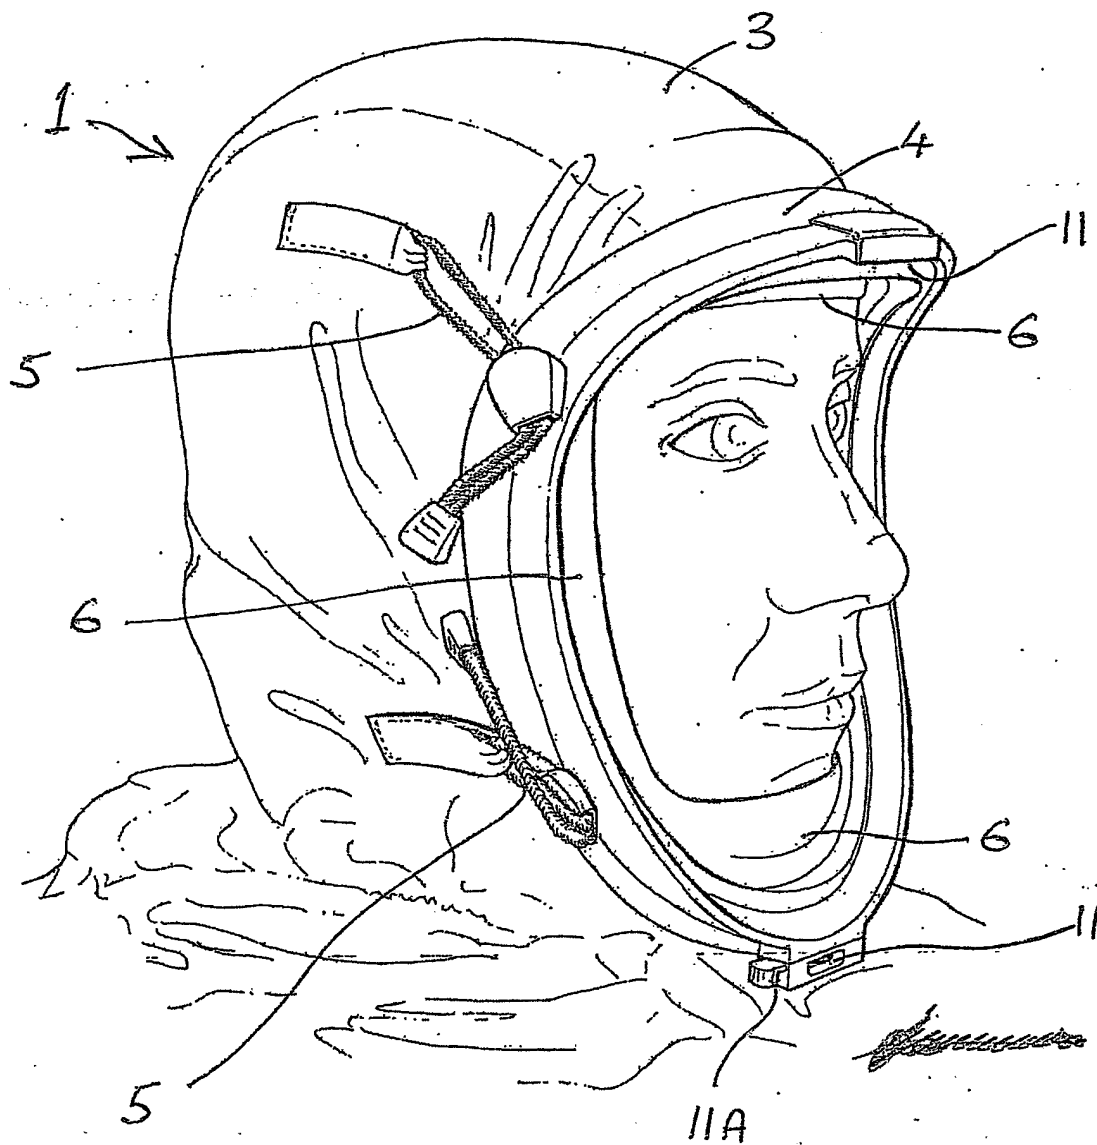Fig. 1

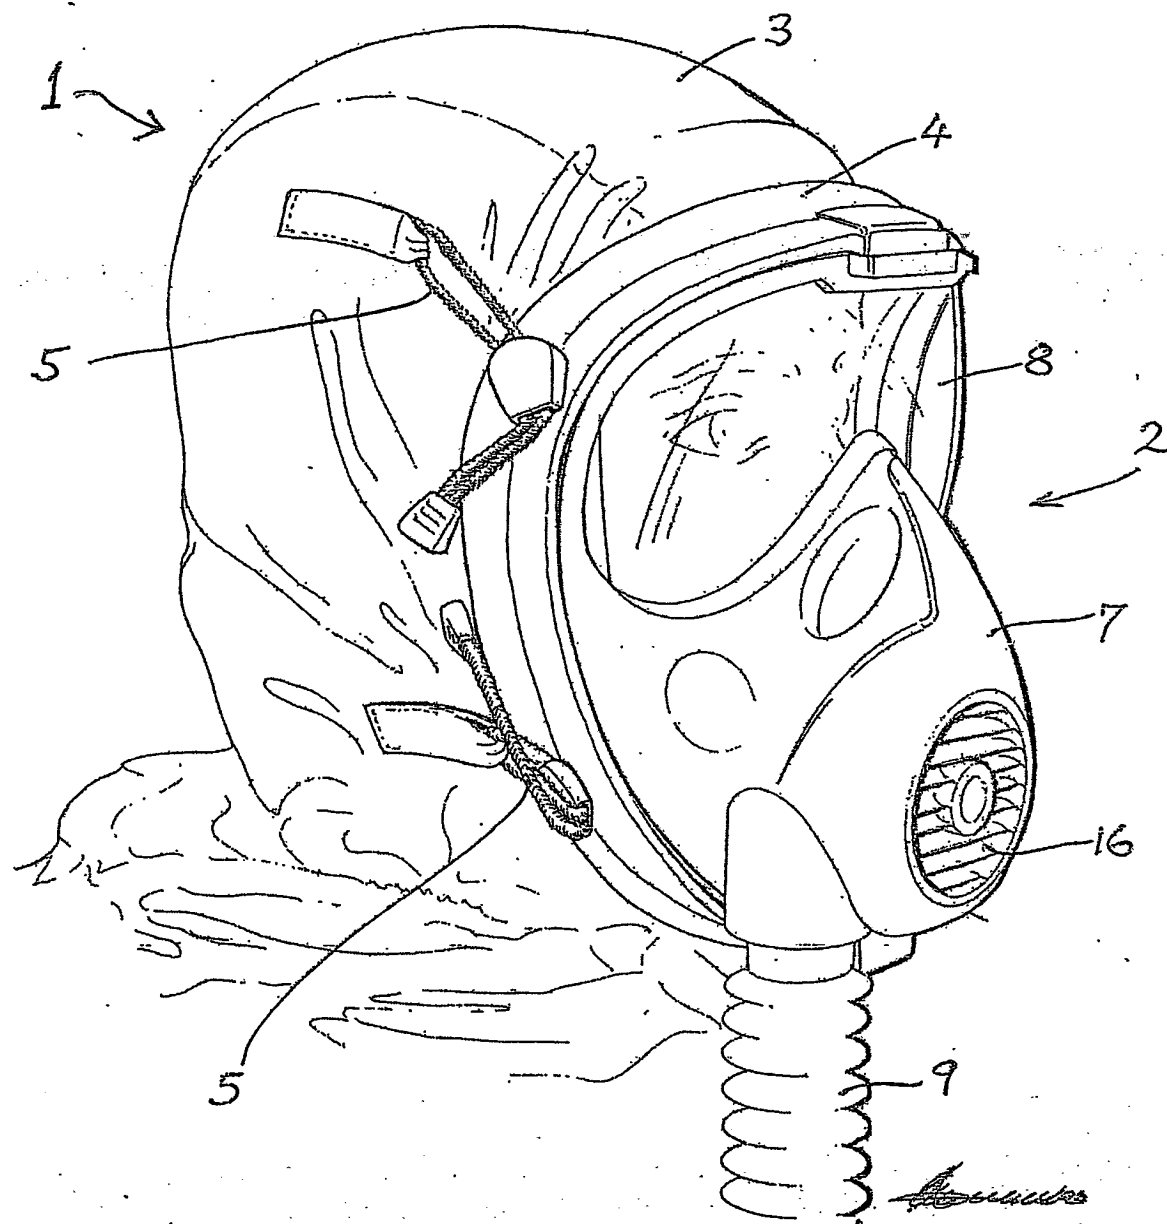Fig. 2

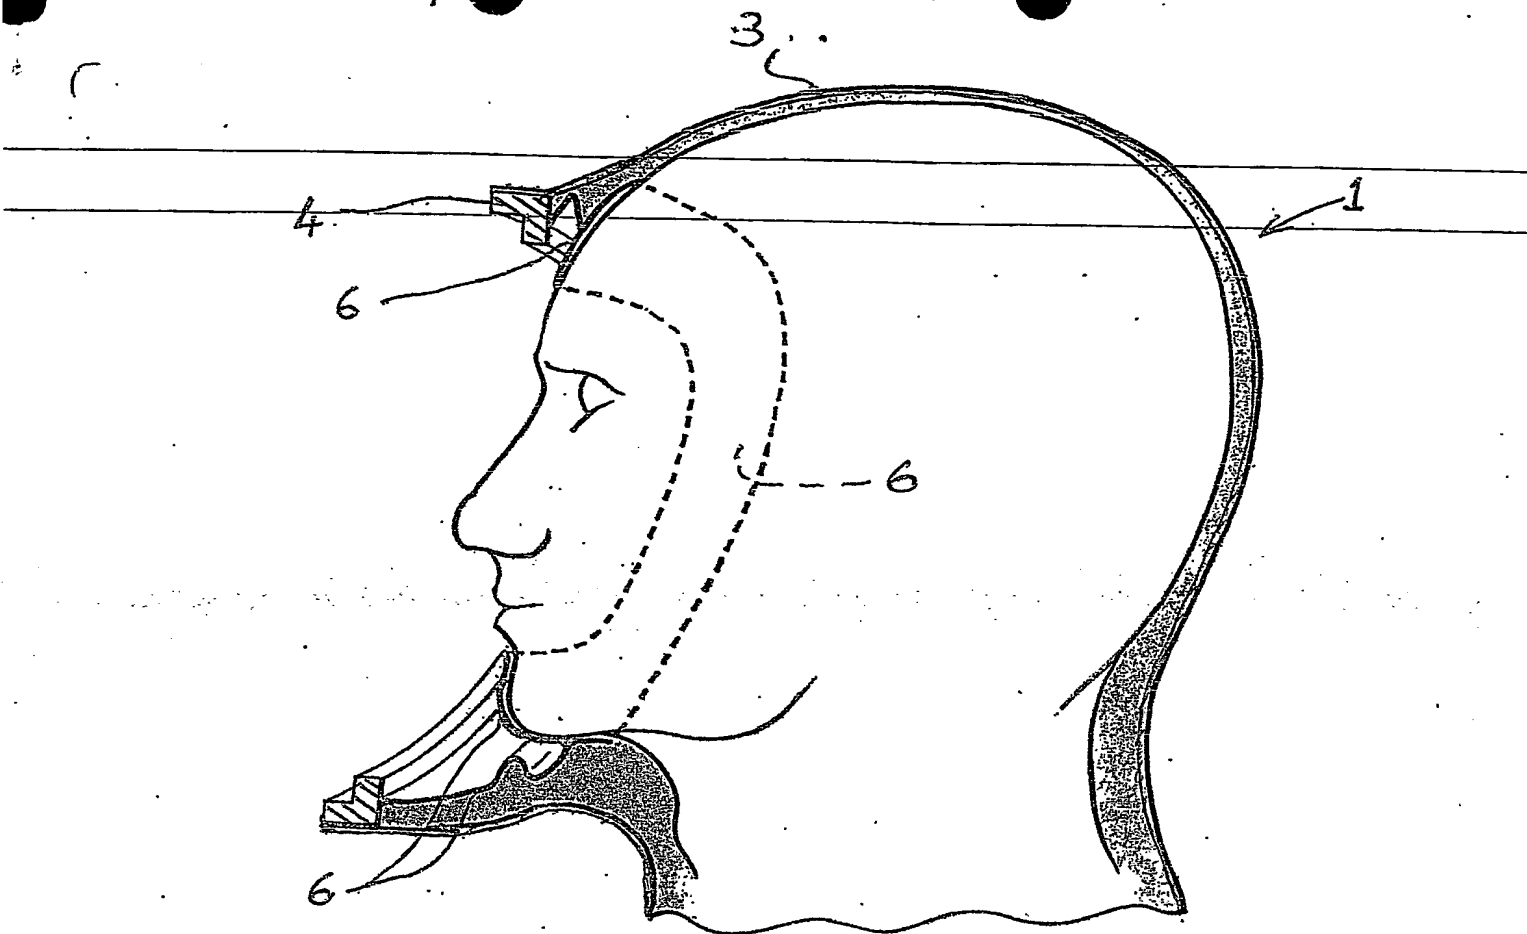


Fig. 3

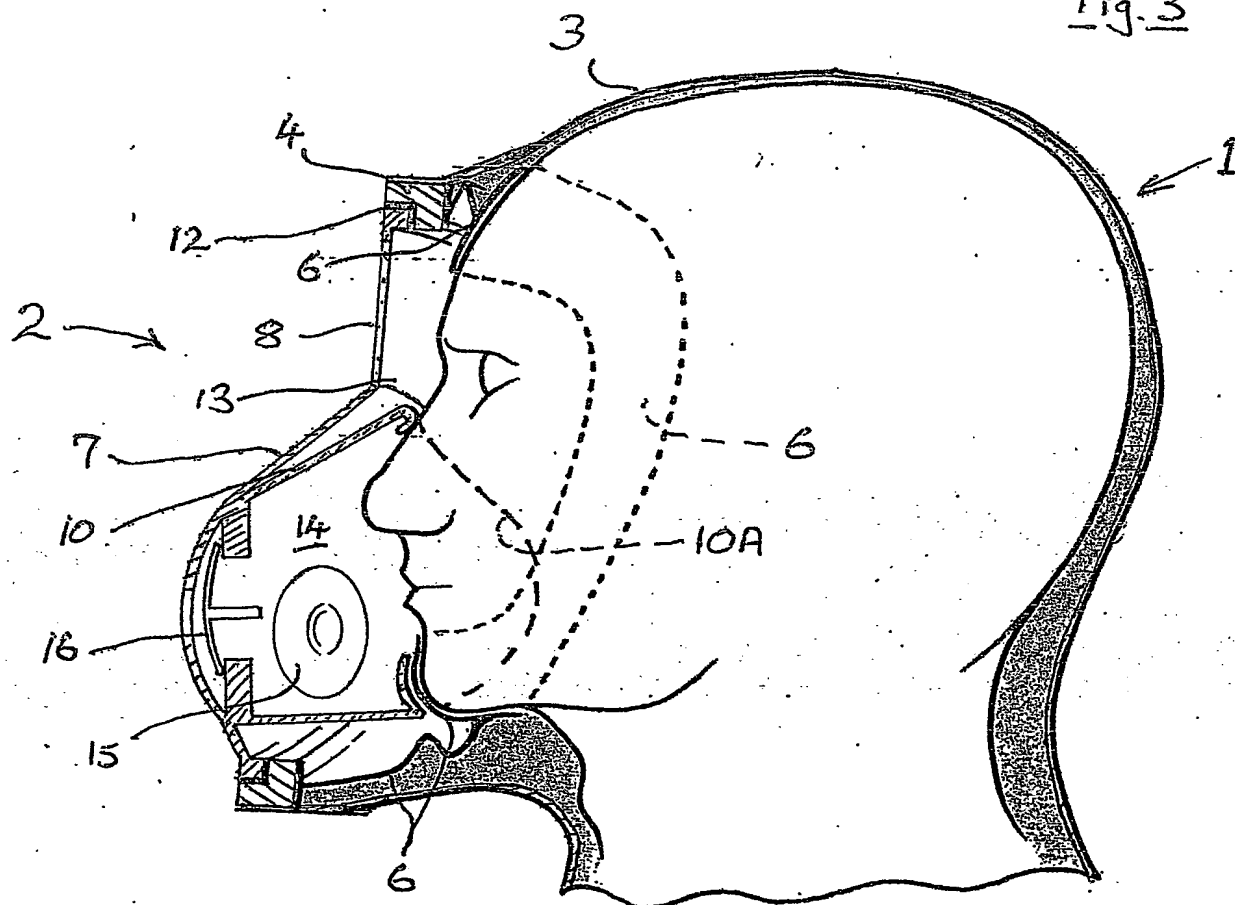


Fig. 4

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.